



# **PT-VERT-GLIDE-24™**

## **24 BAY SECURE CHARGING CART**

**USER MANUAL**

Designed to charge, store and transport up to 24 Chromebooks, laptops or tablets up to 17 inches.

**Specifications:**

Model		PT-VERT-GLIDE-24™
Exterior Dimensions	Inch	50.7 (H) x 19.2 (W) x 19.4 (D)
	cm	128.9 (H) x 49 (W) x 49.5 (D)
Shelf Dimensions	Inch	27 (H) x 12 (W) x 17.5 (D)
	cm	68.5 (H) x 30.4 (W) x 44.5 (D)
Product Weight (Without Devices)		80 lbs (36.2 kg)
Shipping Weight		102 lbs (46.2 kg)
Capacity		24 devices
Supported Devices		Max Device Size: 12" x 17" (30.4 cm x 43.1 cm)
Handle		Included for Installation
Power Specifications (For cabinets sold within North America)		AC IN/ Power Strip: 110V AC, 50/60Hz, 10A Maximum power: 1400W
Power Specifications (For cabinets sold outside North America)		AC IN/ Power Strip: 110-240V AC, 50/60Hz, 10A Maximum power: 2400W
Charging Type		Basic Charging
Security		3 point locking door with padlock loop
Casters		Four 4 inch (10.2 cm) Casters; 2-Locking, 2- Directional
Working Temperature		0° - 30°C
Working RH%		10% - 90%
Storage Temperature		-40° - 60°C
Storage RH%		5% - 95%
Warranty		Lifetime Frame, 2 Years Components, 2 Years Electronics

Specifications subject to change without notice.

This manual covers the following models and part numbers below. Refer to the part numbers and cord end diagrams for your specific region.



**Note: The manual is based upon the North American 110V product offering.**

## MODEL# PT-VERT-GLIDE-24



SKU	DESCRIPTION
CRT-VRT-B24L-D	PT-VERT-GLIDE-24™, 24 Bay, Basic Charging Cart - 110V NA
CRT-VRT-B24L-E	PT-VERT-GLIDE-24™, 24 Bay, Basic Charging Cart - 220V EU
CRT-VRT-B24L-U	PT-VERT-GLIDE-24™, 24 Bay, Basic Charging Cart - 220V UK
CRT-VRT-B24L-A	PT-VERT-GLIDE-24™, 24 Bay, Basic Charging Cart - 240V AU

### Power Cords and Sockets for Specific Region:



#### US / Canada

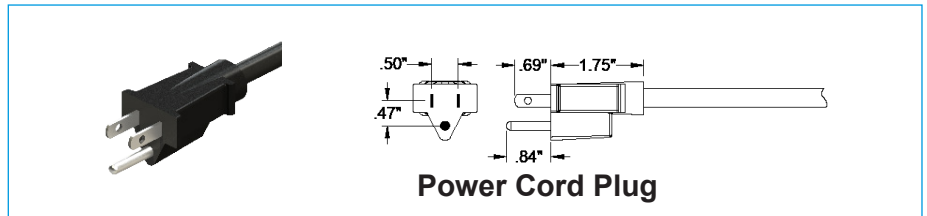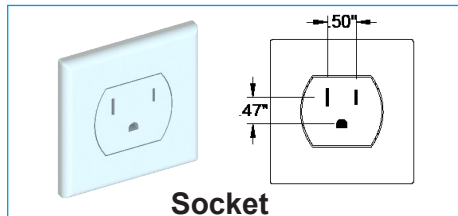



#### United Kingdom

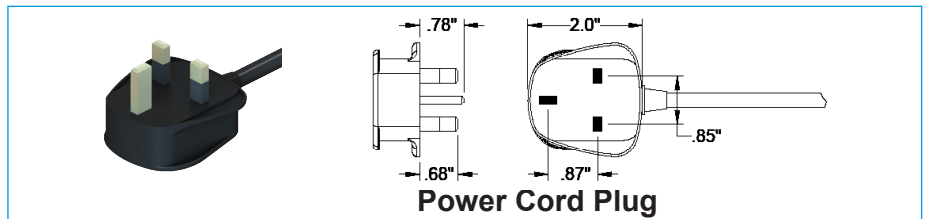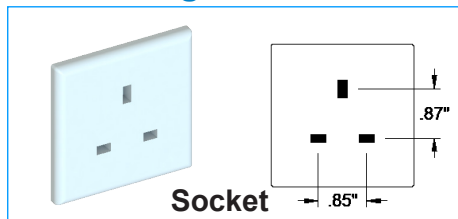

#### European

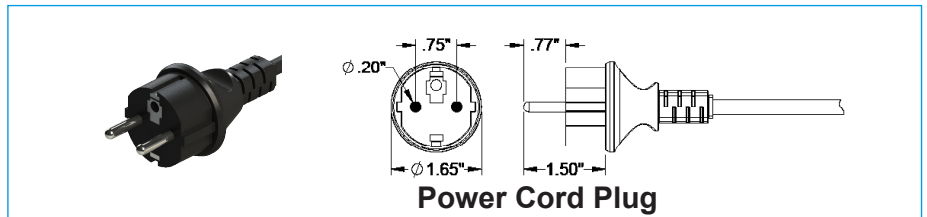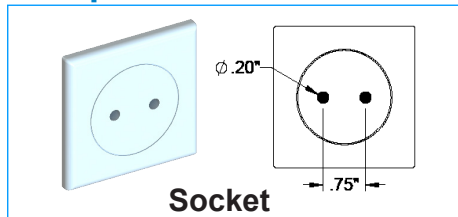

#### Australian

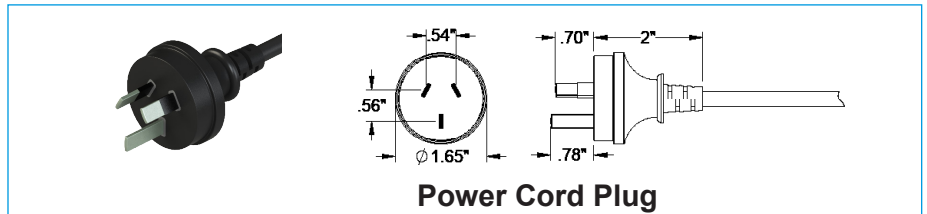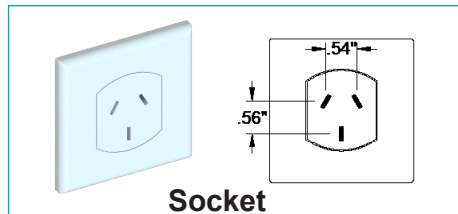

The PT-VERT-GLIDE-24™ Charging Cart is designed to charge and store up to 24 Chromebooks, Laptops or tablets.

**Note: Review this guide before installing devices and to learn how to safely use your cart.**



Front View of Cart (Closed)

Front door folds 270°

Device Cord Pass Through

Push Handle


Cable Organizer



Front View of Cart (Opened) / Rear View

## BLACK CASTER INSTRUCTIONS :

Engage the “BLACK” foot pedal to securely lock the wheels, keeping the cart safely in place.

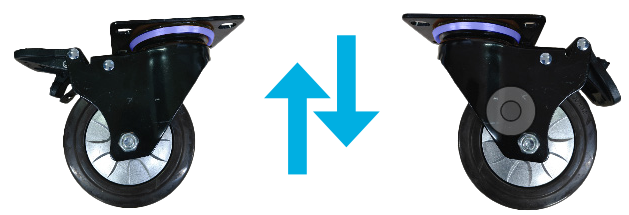


With a simple release of the “BLACK” foot pedal, allowing you to navigate effortless with unparalleled flexibility.




## BLUE CASTER INSTRUCTIONS :

Engage the “Blue” foot pedal for a seamless and precise straight-line movement, making navigation a breeze.

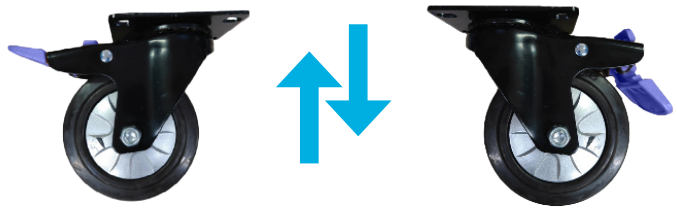

With a simple release of the “Blue” foot pedal, embrace a world of precision and grace in your swivel motion, making maneuvering a breeze.

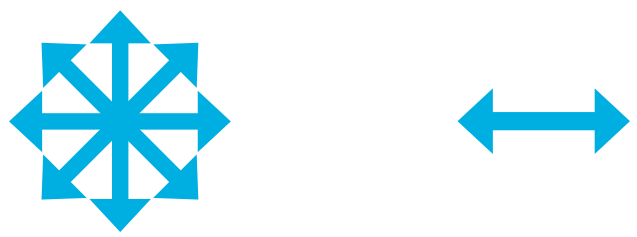

# Installing the Handle



Locate the narrow cardboard box containing the handle rod, handle bolts, mounting brackets & hex wrenches.

On top of the cart, locate the threaded holes for the handle.



Handle Bolts



Using the larger hex wrench, attach and tighten both the left and right side handle mounting bracket to the top of the cart using 4 large bolts.

Fit the handle rod between the bracket and tighten using the smaller hex wrench and handle bolts.

\*Images shown are not of the PT-VERT-GLIDE-24 and are provided for general illustration only.

# Safety Instructions

**Caution**  
**Notice**

**THIS IS NOT A TOY.**  
**ALWAYS FOLLOW SAFETY INSTRUCTIONS.**

**Danger**  
**Warning**

DO NOT Pull the cart using power cord.

**Important**

**THE ELECTRICAL SYSTEM IS DESIGNED TO HANDLE A MAXIMUM OF 1400 WATTS.**  
If wattage exceeds 1400W at one time, charging system may not operate correctly. Remove devices until the total wattage is under 1400W.

Don't connect the cart with broken electrical components.

DO NOT place liquids on or near the cart.

- **MOVE the cart slowly and carefully;** paying close attention to your surroundings.
- **ENSURE all doors are securely latched** before moving to prevent accidental opening.
- **ONLY qualified electricians** should perform any necessary repairs to this unit.
- **ALWAYS turn power switch to "OFF" position before:** (1) Unplugging/Plugging unit from/into wall outlet. (2) Connecting/Disconnecting any external devices.
- **REMOVE any external devices placed on top of unit** before moving to prevent damage/injury.
- **NEVER obstruct ventilation holes** designed for proper air circulation.

DO NOT touch any part of the electrical system while plugged in.

DO NOT attempt to move downstairs.

For warranty claims, please have the following information ready, then visit [www.powertechologies.com](http://www.powertechologies.com) to create a help ticket.

DO NOT use an extension cord with this unit.

DO NOT Roll the cart over the power cord.

Serial Number:  
-----

Charging System Type:  
-----

Date Of Purchase:  
-----

Reseller Name:  
-----

PO Number:  
-----

DO NOT allow children to move or climb.

DO NOT ride or run with the cart.

ONLY ADULTS should move the cart.

**For further information on this product and others, contact Power Technologies at**

Power Technologies  
42035 Zevo Dr  
Temecula, CA 92590+  
888.650.4488

[support@powertechnologies.com](mailto:support@powertechnologies.com)

[www.powertechnologies.com](http://www.powertechnologies.com)

---